

# Leather

Extreme stain & dye transfer protection


# Instruction manual

## PRECAUTIONS:

- Professional Product - Not for do it yourself Use
- Avoid use on white/light colored interiors
- Confirm any leather is standard finished leather only and if unsure perform 2 week visual test on inconspicuous surface
- **Note:** Currently there are a variety of leather and vinyl materials with a variety of coatings used by many auto manufacturers. It is not possible to acquire or test this number of surfaces therefore user must confirm viability on any surface.


## INSTRUCTIONS:

**1**

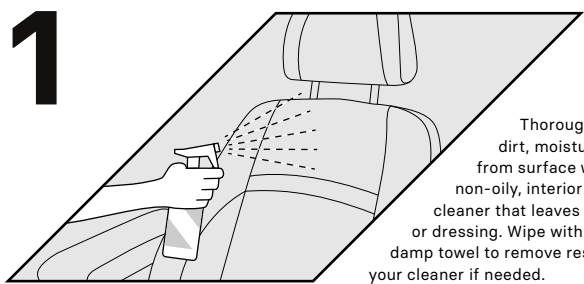


Thoroughly clean all dirt, moisture, and oils from surface with non-oily, interior safe cleaner that leaves no sealant or dressing. Wipe with a water damp towel to remove residue from your cleaner if needed.

**2**

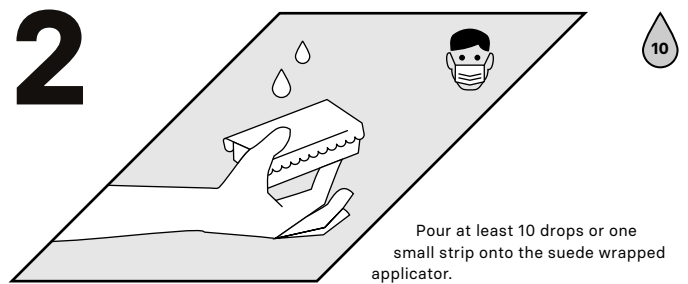


Pour at least 10 drops or one small strip onto the suede wrapped applicator.

**3**

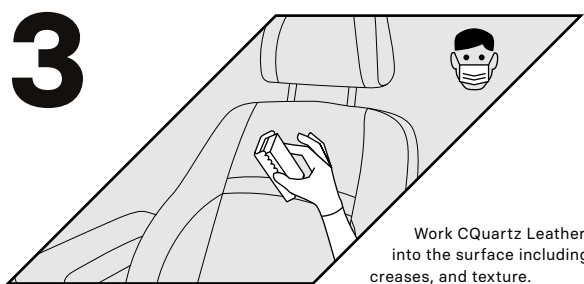


Work CQuartz Leather & Vinyl into the surface including all creases, and texture.

**4**

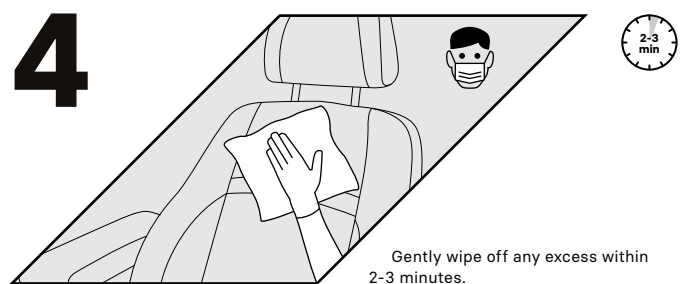


Gently wipe off any excess within 2-3 minutes.

**5**

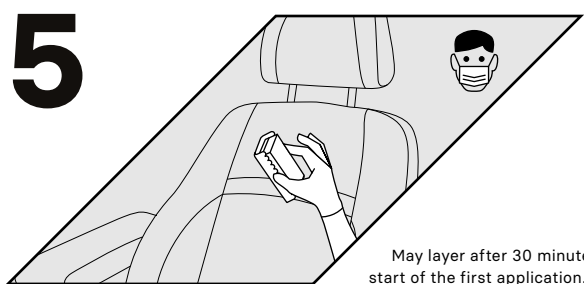

May layer after 30 minutes from start of the first application.

**6**

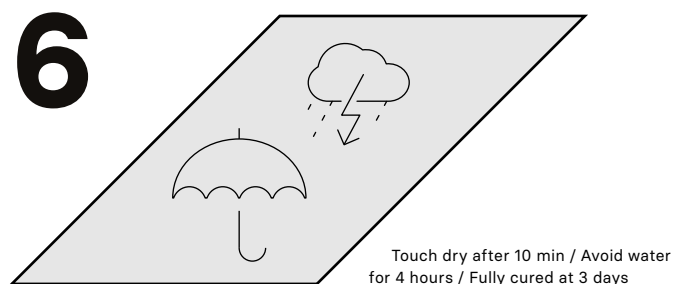

Touch dry after 10 min / Avoid water for 4 hours / Fully cured at 3 days